


NIC-PCIE-1SFP+-PLU

PCI Express x8 Single Port SFP+ 10 Gigabit Server Adapter

(Intel® 82599ES Based)

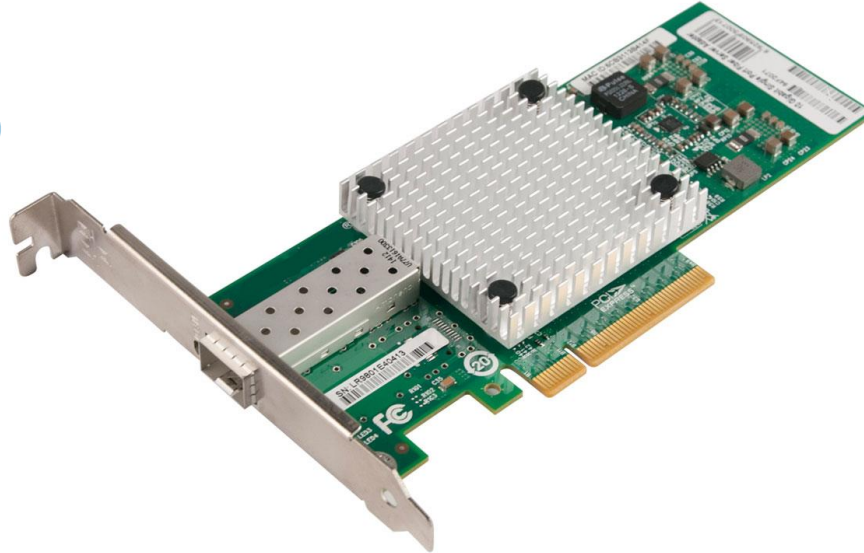

Single-Port 10 Gigabit SFP+ Ethernet Server Adapters Provide Ultimate Flexibility and Scalability in Virtual and Unified Storage Environments

Description:

PLUSOPTIC NIC-PCIE-1SFP+-PLU10G Server Adapters with SFP+ connectivity are the most flexible and scalable Ethernet adapters to meet the demands of today's data center environments. Data center networks are being pushed to their limits. The escalating deployments of servers with multi-core processors and demanding applications such as High Performance Computing (HPC), database clusters, and video-on-demand are driving the need for 10 Gigabit connections. Customers require flexible and scalable I/O solutions to meet the rigorous requirements of running mission-critical applications in virtualized and unified storage environments.

Best Choice for Virtualization

The explosive growth in virtualization is leading to an increasing demand for network performance. With more Virtual Machines (VMs) running on each multi-core server, networking traffic is dramatically increased with each VM competing for available I/O bandwidth. PLUSOPTIC NIC-PCIE-1SFP+-PLU 10G Server Adapters address networking bottlenecks in virtualized environments. These adapters enable network-intensive applications to achieve the performance expected in a virtualized environment.

The PLUSOPTIC 10G NIC-PCIE-1SFP+-PLU server adapter provides the best networking performance available in the industry, whether the physical port is configured in an emulation mode using the virtual switch in the Virtual Machine Monitor (VMM), or is directly assigned to a virtual machine. In the emulation mode, Intel's I/O technology, Virtual Machine Device queues1 (VMDq) optimizes network performance by offloading data sorting and copying from the software Virtual Switch in the VMM to the Intel Ethernet 82599 10 Gigabit Controller. This configuration is best suited for a large number of VMs running standard applications that have limited bandwidth and latency requirements.

For mission-critical applications, where dedicated I/O is required for maximum network performance, users can assign a dedicated virtual adapter port to a VM. Using the PCI-SIG SR-IOV capability on an PLUSOPTIC NIC-PCIE-1SFP+-PLU 10G server adapter provides direct VM connectivity and data protection across VMs. SR-IOV technology allows the data to bypass the software virtual switch and provides near-native performance. It assigns either physical or virtual I/O ports to individual VMs directly. This technology is best suited for applications that demand the highest I/O throughput and lowest latency performance such as database, storage, financial and other applications.

PCI-SIG SR-IOV is a mechanism for devices to advertise their ability to be directly assigned to multiple virtual machines. SR-IOV allows for the partitioning of a PCI function into many virtual interfaces for the purpose of sharing the resources of a PCI Express* (PCIe) device in a virtual environment. These virtual interfaces are called Virtual Functions. Each virtual function can support a unique and separate data path for I/O-related functions within the PCI Express hierarchy. Use of SR-IOV with a networking device, for example, allows the bandwidth of a single port (function) to be partitioned into smaller slices that may be allocated to specific VMs, or guests, via a standard interface.

The PLUSOPTIC LNIC-PCIE-1SFP+-PLU 10G server adapter delivers the same functionality and throughput as ten single-port, one gigabit adapters, saving cost, power, and complexity.

Unified Networking and Storage

The family of PLUSOPTIC NIC-PCIE-1SFP+-PLU 10G server adapters lowers your data center total cost of ownership (TCO) by providing the ability to route LAN and SAN traffic over a single fabric.

Support for Fiber Channel over Ethernet (FCoE)

FCoE encapsulates Fiber Channel frames over standard Ethernet networks, enabling Fiber Channel to take advantage of 10GbE networks while preserving its native protocol. The PLUSOPTIC NIC-PCIE-1SFP+-PLU 10G server adapter offer FCoE hardware acceleration to provide performance comparable to FC HBAs. The server adapters support Data Center Bridging, also known as Converged Enhanced Ethernet (CEE), which allows customers to configure traffic classes and priorities to deliver a lossless Ethernet fabric. An Intel Ethernet X520 server adapter reduces TCO by eliminating

redundant fabrics and saves the cost of expensive FC HBAs and FC switch ports.

Support for iSCSI

The server adapters provide complete support for proven native OS and VMM iSCSI initiators as well as iSCSI boot. Historically, CRC32C computation has degraded system performance, but now with the CRC instruction set included in the latest Intel® Xeon® processors, CRC validation is possible with minimal impact to network throughput while delivering superior data integrity.

The PLUSOPTIC NIC-PCIE-1SFP+-PLU server adapters do it all 10 Gigabit LAN, FCoE, and iSCSI; truly delivering on the promise of unified networking.

Reliable Performance

The family of PLUSOPTIC NIC-PCIE-1SFP+-PLU 10G server adapters includes a number of advanced features that allow it to provide industry-leading performance and reliability.

Security Optimizations

The adapters support IPsec offload for Microsoft's Network Access Protection (NAP), Active Directory,* and future security capabilities in Windows* 7. A PLUSOPTIC NIC-PCIE-1SFP+-PLU 10G server adapter allows customers to run a secure network environment without sacrificing performance.

PCIe v2.0 (5 GT/s)

PCIe v2.0 (5GT/s) support enables customers to take full advantage of 10GbE by providing a maximum of 20Gbps bi-directional throughput per port on a single dual port card.

Designed For Multi-core Processors

Support for technologies such as multiple queues, receive-side scaling, multiple MSI-X vectors, and Low Latency Interrupts allow the PLUSOPTIC NIC-PCIE-1SFP+-PLU 10G server adapter to provide high-performance 10 Gigabit

connectivity in multi-core server blades. These technologies distribute network processing across multiple CPU cores, improving overall performance.

Features

General

Intel® 82599 10 Gigabit Ethernet Controller

SFP+ Connectivity

Low-profile

Load balancing on multiple CPUs

iSCSI remote boot support

Fibre Channel over Ethernet (FCoE) Support

Support for most network operating systems (NOS)

RoHS-compliant2

Intel® PROSet Utility for Windows* Device Manager

Time Sync (IEEE 1588, 802.1as)

I/O Features for Multi-core Processor Servers

Intel® Direct Cache Access (DCA)

MSI-X support

Low Latency Interrupts

Header Splits and Replication in Receive

Multiple Queues: 128 Tx and Rx queues per port

Tx/Rx IP, SCTP, TCP, and UDP checksum offloading (IPv4, IPv6) capabilities

Tx TCP segmentation offload (IPv4, IPv6)

Receive and Transmit Side Scaling for Windows environment and Scalable I/O for Linux* environments (IPv4, IPv6, P/UDP)

IPsec Offload

MacSec

Virtualization Features

VMDq

Next-Generation VMDq1 (64 queues per port)

PC-SIG SR-IOV Implementation (64 virtual functions per port)

Virtual Machine Load Balancing (VLMB)

Advanced Packet Filtering

VLAN support with VLAN tag insertion, stripping and packet filtering for up to 4096 VLAN tags

Manageability Features

Preboot eXecution Environment (PXE) Support

Simple Network Management Protocol (SNMP) and Remote Network Monitoring (RMON) Statistic Counters

iSCSI Boot

Watchdog Timer

Adapter Product Features

Intel® PROSet Utility

Plug and play specification support

Receive Side Scaling

Direct Cache Access (DCA)

Advanced Software Feature

Adapter fault tolerance (AFT)

Switch fault tolerance (SFT)

Adaptive load balancing (ALB)

Teaming support

IEEE 802.3ad (link aggregation control protocol)

PCIe Hot Plug*/Active Periphera Component Interconnect (PCI)

IEEE 802.1Q* VLANs

IEEE 802.3 2005* flow control support

Tx/Rx IP, TCP, & UDP checksum offloading (IPv4, IPv6) capabilities (Transmission control protocol(TCP), user datagram

protocol

(UDP), Internet protocol (IP)

IEEE 802.1p*

TCP segmentation large send offload

MSI-X supports Multiple Independent Queues

Interrupt moderation

IPv6 offloading — Checksum and segmentation capability extended to new standard packet type

Network Operating Systems (NOS) Software Support

Windows 10

Windows 7 32-bit (64-bit)

Windows 8 32-bit (64-bit)

Windows 8.1 32-bit (64-bit)

Windows Vista 32-bit (64-bit)

Windows Server 2003 32-bit (64-bit)

Windows Server 2008 32-bit (64-bit)

Windows Server 2008 R2 32-bit (64-bit)

Windows Server 2012 32-bit (64-bit)

Windows Server 2012 R2 32-bit (64-bit)

Linux kernel 2.6.30 or greater (x86_64) (w/ SR-IOV support)

FreeBSD 7.2 or later

Linux RHEL 5.6

Linux RHEL 6.x

Linux SLES 11 SP1

Linux SLES 10 SP4

OS Independent

DOS NDIS 2

DOS ODI

EFI 1.1

UEFI 2.1

Vmware ESX 4.0²

Vmware ESX 4.0²

VMware Workstation

Ordering Information:

M/N	Description
NIC-PCIE-1SFP+-PLU	PCI Express x8 Single Port SFP+ 10 Gigabit Server Adapter (Intel 82599ES Based)